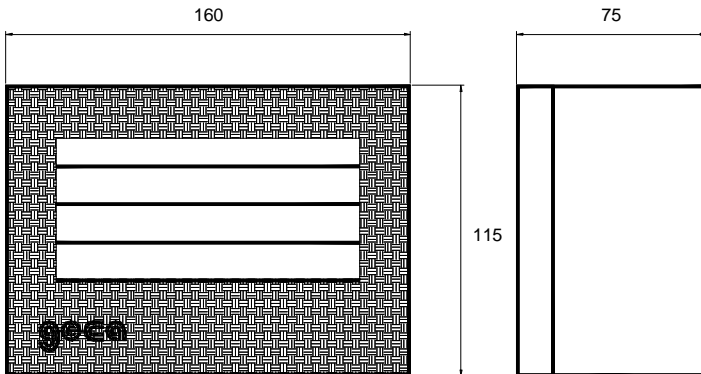



SE301A/B
**SIRENA
SIREN**

**CARATTERISTICHE TECNICHE
TECHNICAL SPECIFICATIONS**

ALIMENTAZIONE (SE301A)	230 Vac
POWER SUPPLY (SE301B)	12Vac/dc
POTENZA (SE301A)	15VA
CONSUMPTION (SE301B)	10VA
INTENSITA' SONORA SOUND INTENSITY	115dB /1m
PROTEZIONE ENCLOSURE RATING	IP43
DIMENSIONI SIZE	160 X 115 X 75 mm

DESCRIZIONE

Le sirene modello SE301A/B sono in grado di emettere una segnalazione acustica a 115dB ed una ottica a luce rossa intermittenti.

L' SE301A è collegabile a qualunque tipo di contatto normalmente aperto a 230Vac (morsetti L e L), mentre la sirena SE301B è collegabile a qualunque tipo di contatto normalmente aperto a 12 Vac o 12Vdc (morsetti 12Vac/dc).

All'interno dell'apparecchio sono visibili due morsetti ausiliari (morsetti B e B) da utilizzare con un interruttore o con un pulsante normalmente chiuso collegato ad un relè temporizzato per la tacitazione della sola segnalazione acustica fino al ripristino delle condizioni di normalità.

DESCRIPTION

The sirens model SE301A/B are designed to emit an audible alarm of 115dB intensity and a red intermittent light.

The SE301A can be connected to any N.O. 230V contact (terminals L and L).

The SE301B can be connected to any N.O. 12Vac or 12Vdc contact (terminals 12Vdc/ac).

Inside the unit, two auxiliary terminals (B and B) can be employed with a normally closed push-button connected with a timed relay to mute the audible alarm unit the normally conditions have been restored.

geca SE301A/B**SIRENA
SIREN**